



1 CORE

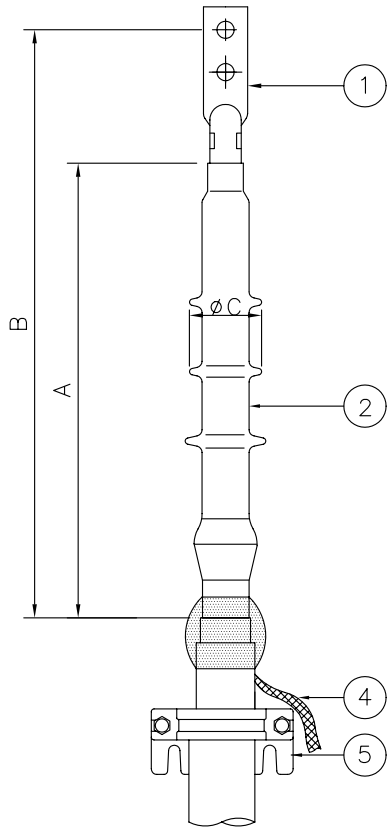

3 CORE

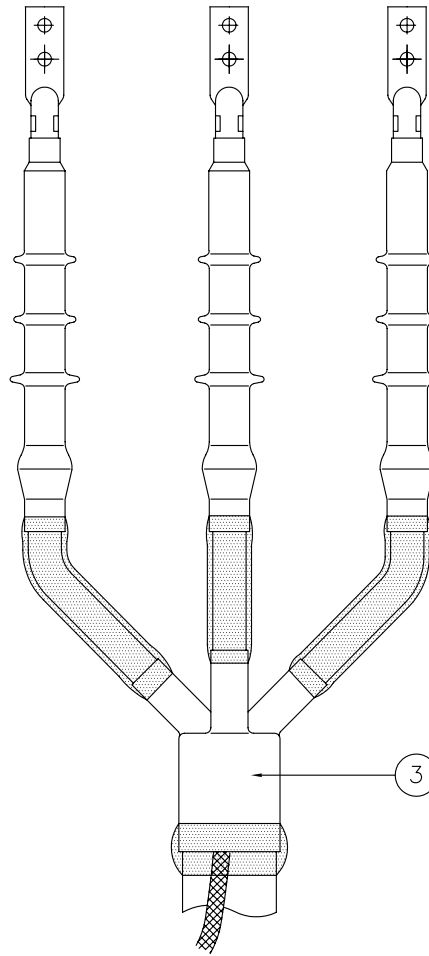

Symbol	A	B	ØC	Insulation Range		
				Min	Max	
EB	214	313	33.4	11.0	14.0	
EF				12.5	15.5	
FA			34.5	14.0	17.0	
FAB			36.3	15.5	18.5	
GA			41.0	18.5	21.5	
GH			333	43.7	21.5	24.5
HA			330	47.3	24.5	27.5
HJ	225	369	62.2	26.5	29.0	
JA				29.5	32.0	
JAB			64.9	32.0	35.0	
JB			71.6	35.0	38.0	

NOTE

1. 일반공차 : ±5%

5	Bracket	-			
4	Copper Braid	Copper Alloy			3core만적용
3	Trifurcating Groove	EPDM Rubber			3core만적용
2	Housing	EPDM Rubber			
1	Terminal Lug	Copper Alloy			
NO	DESCRIPTION	MATERIAL	Q'TY	DWG. NO	REMARK

이 자료는 평일산업주식회사의
산업재산권이므로, 무단복사 또는
타인에게 유포할 수 없습니다.
PYUNG-IL INDUSTRIAL CO.,LTD.
PROPRIETARY RIGHTS

UNIT	mm
SCALE	1:1(A3)
PROJ.	3RD ANGLE
DATE	2001.08.08.
DATE	2001.08.08.

			TITLE		6SMT FOR 6.6 kV 종단접속재		
DSGN BY	CHKD BY	APPD BY	DWG NO	PIS02507	REV NO	0	
K.S. CHOI			REF NO	-	SHT NO	/	

DATE	RVSD BY	REVISED CONTENTS
------	---------	------------------