



1 CORE

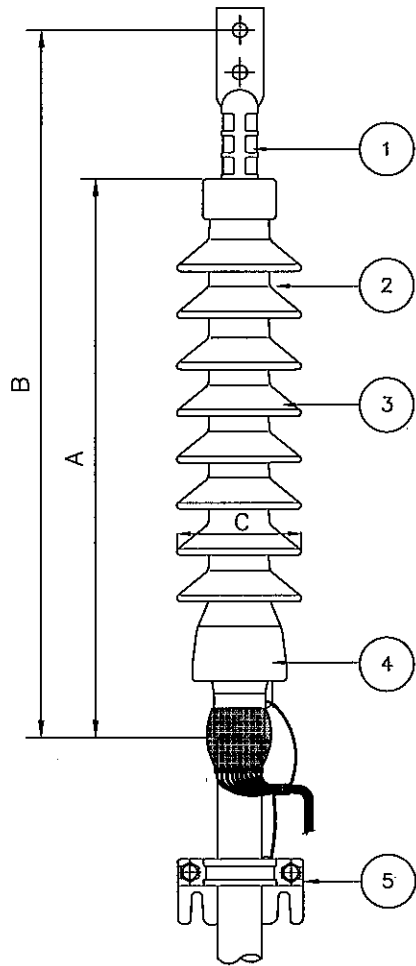

3 CORE

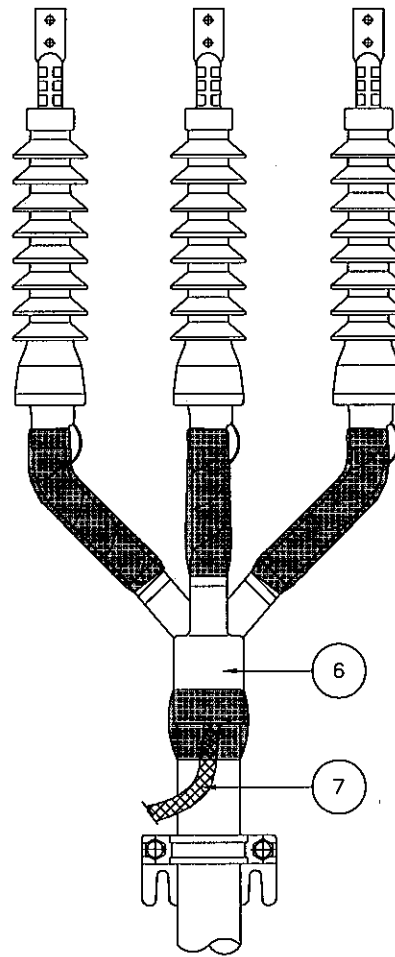

Symbol	A	B	C	Insulation Range	
				Min	Max
G	456	595	95.5	21.0	23.0
J	497	635		23.0	25.0
N	456	595		25.5	28.0
JA	467	606	108	29.0	31.0
JAB	506	666		31.0	32.5
JB	463	628		33.5	35.0
KA	506	666		36.5	38.0
KB	467	628		39.5	41.0
PA				41.5	43.0
PW	411	572	120	44.5	47.5
Q	467	628		51.5	53.0

NOTE

1. 일반공차 : ±5%

NO	DESCRIPTION	MATERIAL	Q'TY	DWG. NO	REMARK
7	Copper Braid	Copper Alloy			
6	Trifurcating Groove Bracket	EPDM Rubber			
5	Stress Cone	EPDM Rubber			
4	Module(Skirt)	EPDM Rubber			
3	Rain Cap	EPDM Rubber			
2	Terminal Lug	Copper Alloy			

이 자료는 평일산업주식회사의
산업재산권이므로, 무단복사 또는
타인에게 유출할 수 없습니다.
PYUNG-IL INDUSTRIAL CO.,LTD.
PROPRIETARY RIGHTS

DATE	RVSD BY	REVISED CONTENTS	UNIT	mm	PYUNG-IL IND. CO., LTD	TITLE	K35MT FOR 종단접속제				
			SCALE	1:1(A3)		DSGN BY	CHKD BY	APPD BY	DWG NO	REV NO	0
			PROJ.	3RD ANGLE	B.Y. HAN			REF NO	-	SHT NO	/
			DATE	2008.07.16							